


# 16x40x7 CRWA1 R

## Dimensions

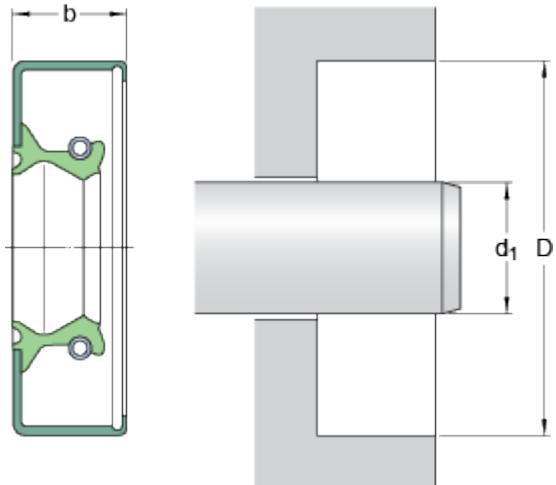

d <sub>1</sub>	16	mm
D	40	mm
b	7	mm

## Application and operating conditions

Pressure differential	max.	0.07	MPa
Operating temperature	min.	-40	°C
Operating temperature	max.	100	°C
Operating temperature, short period	max.	120	°C
Rotational speed	max.	21487	r/min
Shaft surface speed	max.	18	m/s