



# 2304 E-2RS1TN9

## Dimensions

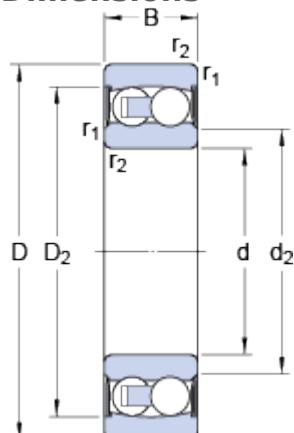

d	20	mm
D	52	mm
B	21	mm
$d_2$	$\approx$ 28.6	mm
$D_2$	$\approx$ 46.21	mm
$r_{1,2}$	min.	1.1 mm

## Abutment dimensions

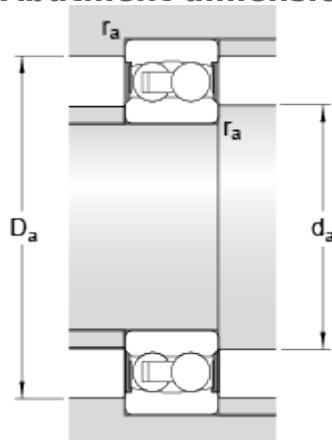

$d_a$	min.	26.5	mm
$d_a$	max.	28.5	mm
$D_a$	max.	45	mm
$r_a$	max.	1.1	mm

## Calculation data

Basic dynamic load rating	C	14.3	kN
Basic static load rating	C	4	kN
Fatigue load limit	$P_u$	0.21	kN
Limiting speed		9000	r/min
Permissible angular misalignment	$\alpha$	1.5	°
Calculation factor	$k_r$	0.05	
Calculation factor	e	0.28	
Calculation factor	Y	2.5	
Calculation factor	$Y_1$	2.2	
Calculation factor	$Y_2$	3.5	

## Mass

Mass bearing	0.21	kg
--------------	------	----