



61808

Dimensions

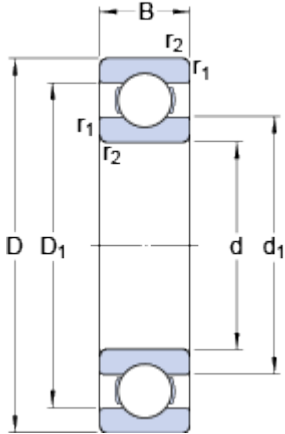

d		40	mm
D		52	mm
B		7	mm
d ₁	≈	43.21	mm
D ₁	≈	48.1	mm
r _{1,2}	min.	0.3	mm

Abutment dimensions

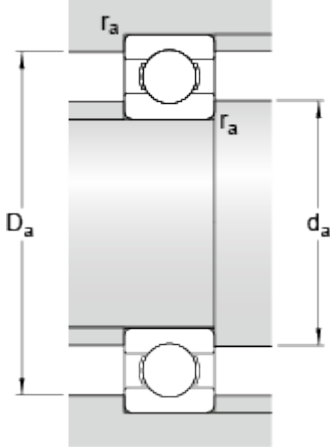

d _a	min.	42	mm
D _a	max.	50	mm
r _a	max.	0.3	mm

Calculation data

Basic dynamic load rating	C	4.49	kN
Basic static load rating	C	3.75	kN
Fatigue load limit	P _u	0.16	kN
Reference speed		26000	r/min
Limiting speed		16000	r/min
Calculation factor	k _r	0.015	
Calculation factor	f	14.6	

Mass

Mass bearing		0.032	kg
--------------	--	-------	----