


Dimensions



| | | |
|----------------|--------|----|
| d | 9 | mm |
| D | 26 | mm |
| B | 8 | mm |
| d ₁ | ≈ 14.8 | mm |
| D ₂ | ≈ 22.6 | mm |

Abutment dimensions

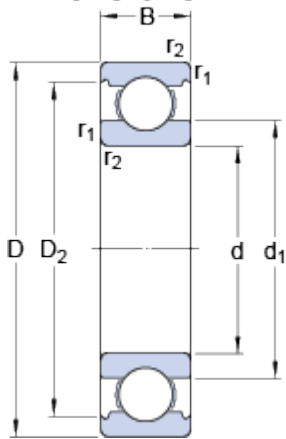

| | | | |
|----------------|------|------|----|
| d _a | min. | 11.4 | mm |
| D _a | max. | 23.6 | mm |
| r _a | max. | 0.3 | mm |

Calculation data

| | | | |
|---------------------------|----------------|-------|-------|
| Basic dynamic load rating | C | 4.75 | kN |
| Basic static load rating | C | 1.96 | kN |
| Fatigue load limit | P _u | 0.083 | kN |
| Reference speed | | 60000 | r/min |
| Limiting speed | | 38000 | r/min |
| Calculation factor | k _r | 0.025 | |
| Calculation factor | f | 12 | |

Mass

| | | |
|--------------|-------|----|
| Mass bearing | 0.019 | kg |
|--------------|-------|----|