


7203 BECBP


SKF Explorer

Dimensions

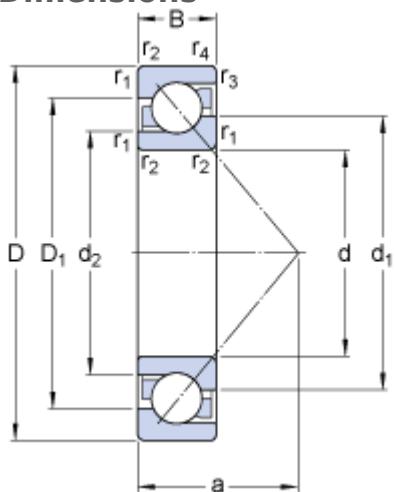

d	17	mm
D	40	mm
B	12	mm
d_1	\approx 26.25	mm
d_2	\approx 21.66	mm
D_1	\approx 31.15	mm
a	18	mm
$r_{1,2}$	min. 0.6	mm
$r_{3,4}$	min. 0.6	mm

Abutment dimensions

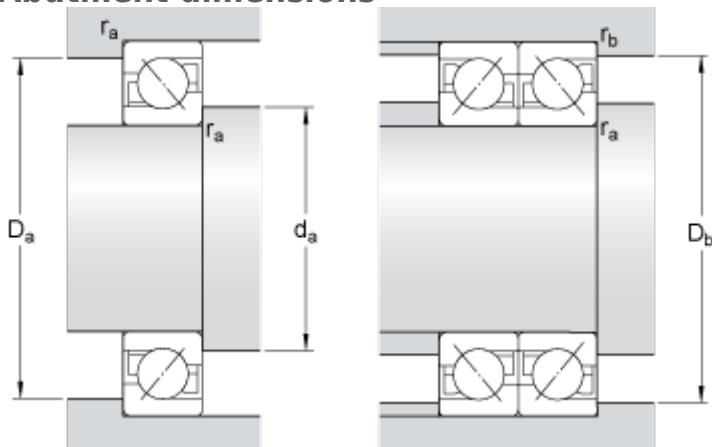

d_a	min.	21.2	mm
D_a	max.	35.8	mm
D_b	max.	35.8	mm
r_a	max.	0.6	mm
r_b	max.	0.6	mm

Calculation data

Basic dynamic load rating	C	11	kN
Basic static load rating	C	5.85	kN
Fatigue load limit	P_u	0.25	kN
Reference speed		15000	r/min
Limiting speed		22000	r/min
Calculation factor	A	0.000625	
Calculation factor	k_r	0.095	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35
Calculation factor	Y	0.26
Calculation factor	Y_2	0.57

Bearing pair arranged back-to-back or face-to-face

Calculation factor	X	0.57
Calculation factor	Y	0.52

Calculation factor	Y_1	0.55
Calculation factor	Y_2	0.93
Mass		
Mass bearing	0.065	kg