

# 7209 BECBJ


SKF Explorer

## Dimensions



d	45	mm
D	85	mm
B	19	mm
d <sub>1</sub>	≈ 60.85	mm
d <sub>2</sub>	≈ 52.68	mm
D <sub>1</sub>	≈ 70.15	mm
a	37	mm
r <sub>1,2</sub>	min. 1.1	mm
r <sub>3,4</sub>	min. 0.6	mm

## Abutment dimensions

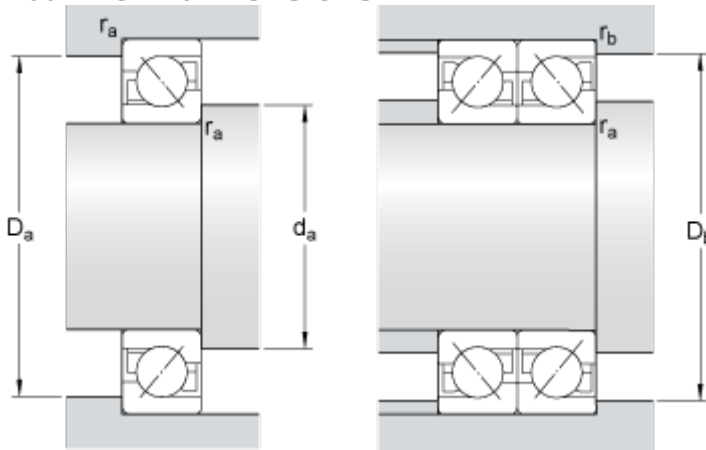

d <sub>a</sub>	min. 52	mm
D <sub>a</sub>	max. 78	mm
D <sub>b</sub>	max. 80.8	mm
r <sub>a</sub>	max. 1	mm
r <sub>b</sub>	max. 0.6	mm

## Calculation data

Basic dynamic load rating	C	38	kN
Basic static load rating	C	28.5	kN
Fatigue load limit	P <sub>u</sub>	1.22	kN
Reference speed		6700	r/min
Limiting speed		10000	r/min
Calculation factor	A	0.012	
Calculation factor	k <sub>r</sub>	0.095	
Calculation factor	e	1.14	

## Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35
Calculation factor	Y	0.26
Calculation factor	Y <sub>2</sub>	0.57

## Bearing pair arranged back-to-back or face-to-face

Calculation factor	X	0.57
Calculation factor	Y	0.52

Calculation factor	$Y_1$	0.55
Calculation factor	$Y_2$	0.93

### Mass

---

Mass bearing		0.42	kg
--------------	--	------	----