



7215 BEP

Dimensions

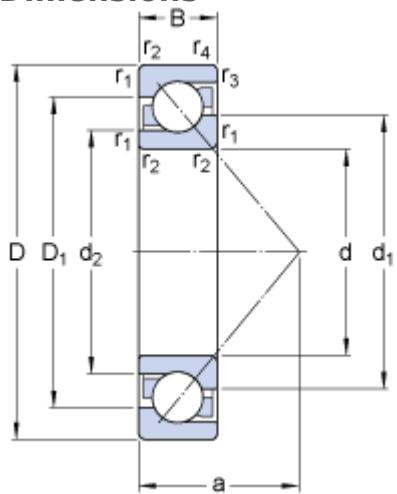

d	75	mm
D	130	mm
B	25	mm
d_1	\approx	96.3 mm
d_2	\approx	85.25 mm
D_1	\approx	110.1 mm
a	56	mm
$r_{1,2}$	min.	1.5 mm
$r_{3,4}$	min.	1 mm

Abutment dimensions

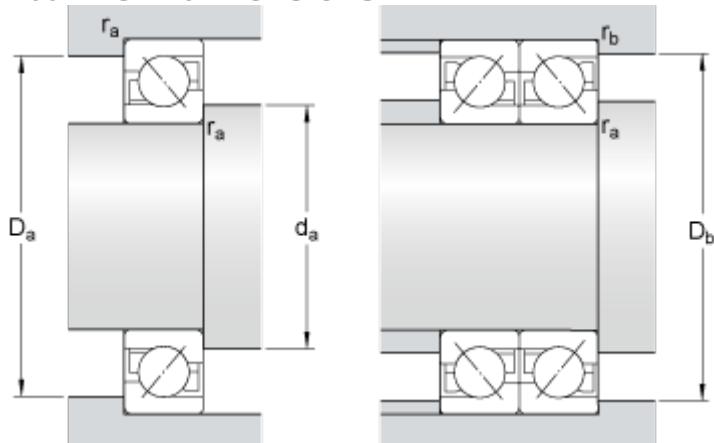

d_a	min.	84	mm
D_a	max.	121	mm
D_b	max.	124	mm
r_a	max.	1.5	mm
r_b	max.	1	mm

Calculation data

Basic dynamic load rating	C	70.2	kN
Basic static load rating	C	60	kN
Fatigue load limit	P_u	2.5	kN
Reference speed		5600	r/min
Limiting speed		5600	r/min
Calculation factor	A	0.0599	
Calculation factor	k_r	0.095	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35
Calculation factor	Y	0.26
Calculation factor	Y_2	0.57

Bearing pair arranged back-to-back or face-to-face

Calculation factor	X	0.57
Calculation factor	Y	0.52
Calculation factor	Y_1	0.55

Calculation factor	Y_2	0.93
Mass		

Mass bearing	1.2	kg
--------------	-----	----