


7218 BECBM


SKF Explorer

Dimensions

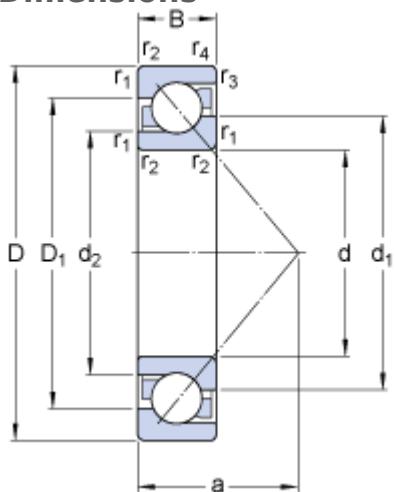

d	90	mm
D	160	mm
B	30	mm
d_1	\approx 117.1	mm
d_2	\approx 103.06	mm
D_1	\approx 134.8	mm
a	67	mm
$r_{1,2}$	min. 2	mm
$r_{3,4}$	min. 1	mm

Abutment dimensions

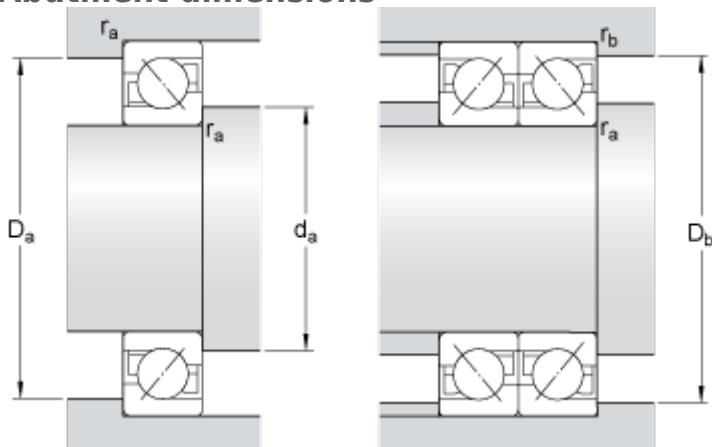

d_a	min.	101	mm
D_a	max.	149	mm
D_b	max.	154	mm
r_a	max.	2	mm
r_b	max.	1	mm

Calculation data

Basic dynamic load rating	C	116	kN
Basic static load rating	C	104	kN
Fatigue load limit	P_u	4	kN
Reference speed		3600	r/min
Limiting speed		6300	r/min
Calculation factor	A	0.149	
Calculation factor	k_r	0.095	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35
Calculation factor	Y	0.26
Calculation factor	Y_2	0.57

Bearing pair arranged back-to-back or face-to-face

Calculation factor	X	0.57
Calculation factor	Y	0.52

Calculation factor	Y_1	0.55
Calculation factor	Y_2	0.93
Mass		
Mass bearing	2.3	kg