


7310 BECBJ


SKF Explorer

Dimensions

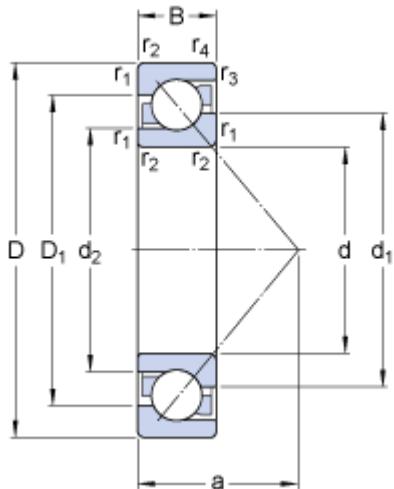

d	50	mm	
D	110	mm	
B	27	mm	
d_1	\approx 73.8	mm	
d_2	\approx 61.13	mm	
D_1	\approx 88.8	mm	
a	47	mm	
$r_{1,2}$	min.	2	mm
$r_{3,4}$	min.	1	mm

Abutment dimensions

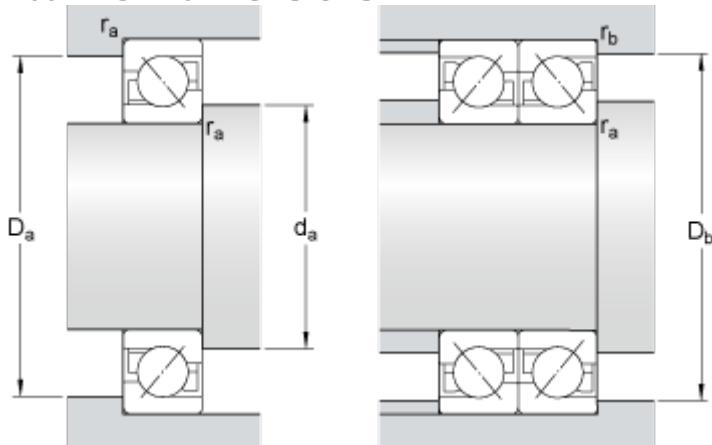

d_a	min.	61	mm
D_a	max.	99	mm
D_b	max.	104	mm
r_a	max.	2	mm
r_b	max.	1	mm

Calculation data

Basic dynamic load rating	C	75	kN
Basic static load rating	C	51	kN
Fatigue load limit	P_u	2.16	kN
Reference speed		5300	r/min
Limiting speed		8000	r/min
Calculation factor	A	0.0418	
Calculation factor	k_r	0.1	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35
Calculation factor	Y	0.26
Calculation factor	Y_2	0.57

Bearing pair arranged back-to-back or face-to-face

Calculation factor	X	0.57
Calculation factor	Y	0.52

Calculation factor	Y_1	0.55
Calculation factor	Y_2	0.93
Mass		
Mass bearing	1.1	kg