



GE 17 C

Dimensions

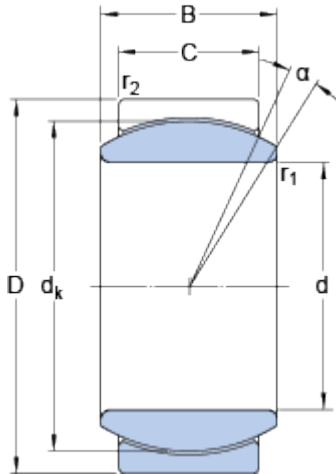

| | | |
|----------------|----------|----|
| d | 17 | mm |
| D | 30 | mm |
| B | 14 | mm |
| C | 10 | mm |
| α | 10 | ° |
| dk | 25 | mm |
| r ₁ | min. 0.3 | mm |
| r ₂ | min. 0.3 | mm |

Abutment dimensions

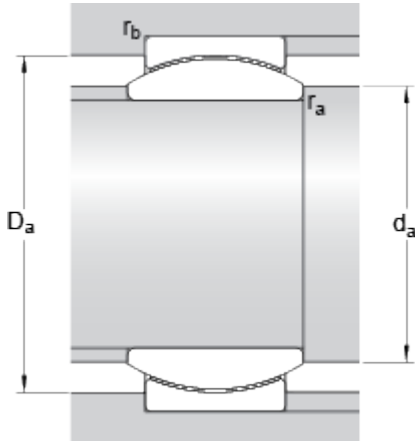

| | | |
|----|-----------|----|
| da | min. 18.7 | mm |
| da | max. 20.7 | mm |
| Da | min. 23.7 | mm |
| Da | max. 28.5 | mm |
| ra | max. 0.3 | mm |
| rb | max. 0.3 | mm |

Calculation data

| | | | |
|------------------------------|----------------|------|-------------------|
| Basic dynamic load rating | C | 22.4 | kN |
| Basic static load rating | C | 56 | kN |
| Specific dynamic load factor | K | 100 | N/mm ² |
| Specific static load factor | K | 250 | N/mm ² |
| Material constant | K _M | 1400 | |

Mass

| | | | |
|--------------------|--|------|----|
| Mass plain bearing | | 0.05 | kg |
|--------------------|--|------|----|