


KRE 16 PPA

Dimensions

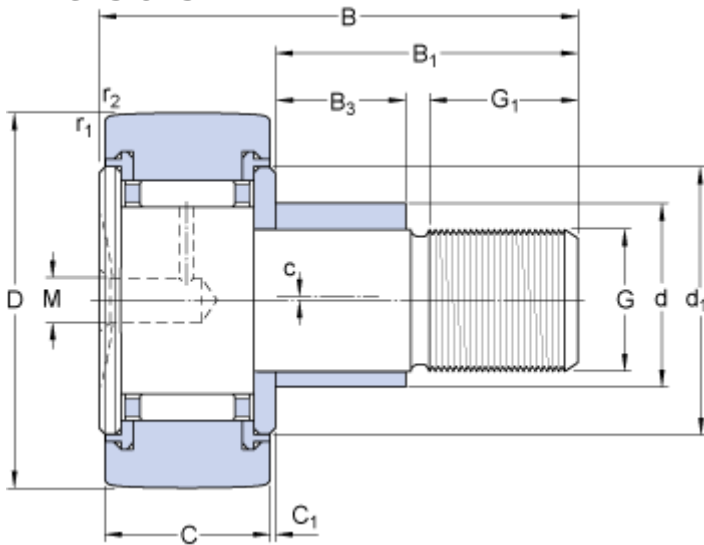

D	16	mm
d	9	mm
B	28	mm
C	11	mm
B ₁	16	mm
B ₃	7	mm
C ₁	0.6	mm
d ₁	12.5	mm
G	M 6	
G ₁	8	mm
M	4	mm
c	0.5	mm
r _{1,2}	min. 0.15	mm

Calculation data

Basic dynamic load rating	C	3.14	kN
Basic static load rating	C	3.2	kN
Fatigue load limit	P _u	0.345	kN
Maximum dynamic radial loads	F _r	max. 2.9	kN
Maximum static radial loads	F _{0r}	max. 4.15	kN
Limiting speed		6000	r/min

Mass

Mass cam follower	0.02	kg
-------------------	------	----

Mounting information

Recommended tightening torque	3	N·m
-------------------------------	---	-----

Included products

Grease fitting	NIP A1
Hexagonal nut	M 6x1

Associated products

Plug	VD1
------	-----