


KRV 16 PPA

Dimensions

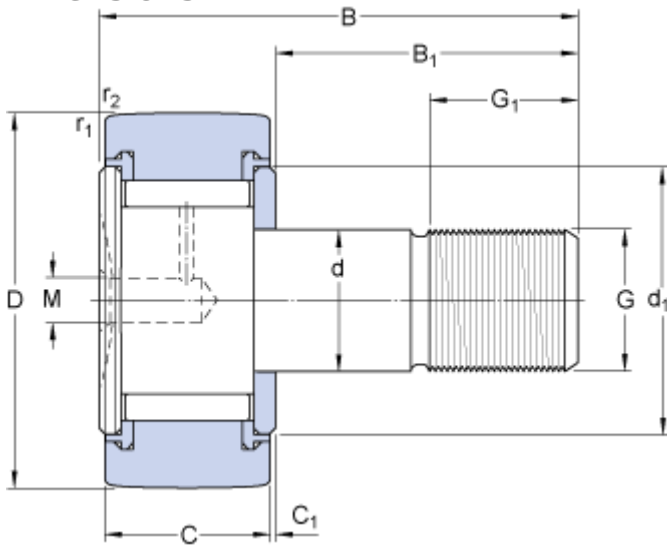

D	16	mm
d	6	mm
B	28	mm
C	11	mm
B ₁	16	mm
C ₁	0.6	mm
d ₁	12.5	mm
G	M 6	
G ₁	8	mm
M	4	mm
r _{1,2}	min. 0.15	mm

Calculation data

Basic dynamic load rating	C	4.73	kN
Basic static load rating	C	6.55	kN
Fatigue load limit	P _u	0.72	kN
Maximum dynamic radial loads	F _r	max. 4.05	kN
Maximum static radial loads	F _{0r}	max. 5.7	kN
Limiting speed		4300	r/min

Mass

Mass cam follower	0.019	kg
-------------------	-------	----

Mounting information

Recommended tightening torque	3	N·m
-------------------------------	---	-----

Included products

Grease fitting	NIP A1
Hexagonal nut	M 6x1

Associated products

Plug	VD1
------	-----