


K 16x22x12

Dimensions

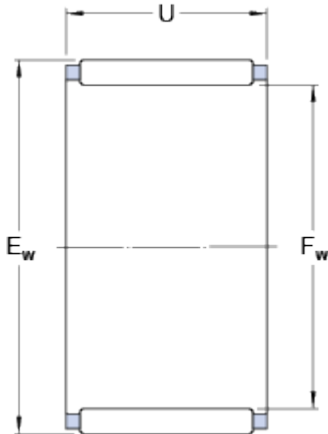

F_w	16	mm
E_w	22	mm
U	12	mm

Calculation data

Basic dynamic load rating	C	11	kN
Basic static load rating	C	12.5	kN
Fatigue load limit	P_u	1.5	kN
Reference speed		22000	r/min
Limiting speed		26000	r/min

Mass

Mass needle roller and cage assembly	0.01	kg
--------------------------------------	------	----

Associated products

Designation associated G design radial shaft seal with a low cross-sectional height	G 16x22x3
Designation associated SD design radial shaft seal with a low cross-sectional height	SD 16x22x3