


K 20x28x20

Dimensions

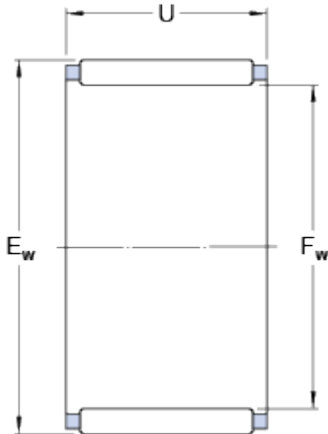

| | | |
|-------|----|----|
| F_w | 20 | mm |
| E_w | 28 | mm |
| U | 20 | mm |

Calculation data

| | | | |
|---------------------------|-------|-------|-------|
| Basic dynamic load rating | C | 22.9 | kN |
| Basic static load rating | C | 28.5 | kN |
| Fatigue load limit | P_u | 3.45 | kN |
| Reference speed | | 18000 | r/min |
| Limiting speed | | 20000 | r/min |

Mass

| | | |
|--------------------------------------|-------|----|
| Mass needle roller and cage assembly | 0.027 | kg |
|--------------------------------------|-------|----|

Associated products

| | |
|--------------------------------------------------------------------------------------|----------------------------|
| Designation associated G design radial shaft seal with a low cross-sectional height | G 20x28x4 |
| Designation associated SD design radial shaft seal with a low cross-sectional height | SD 20x28x4 |