


# K 32x37x13

## Dimensions

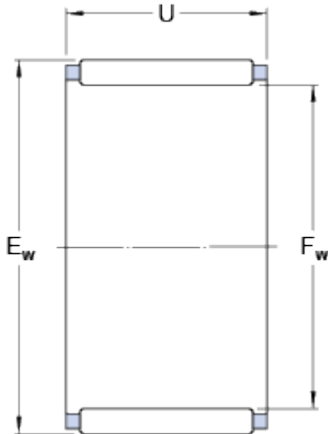

|                |    |    |
|----------------|----|----|
| F <sub>w</sub> | 32 | mm |
| E <sub>w</sub> | 37 | mm |
| U              | 13 | mm |

## Calculation data

|                           |                |       |       |
|---------------------------|----------------|-------|-------|
| Basic dynamic load rating | C              | 14.7  | kN    |
| Basic static load rating  | C              | 25.5  | kN    |
| Fatigue load limit        | P <sub>u</sub> | 3     | kN    |
| Reference speed           |                | 13000 | r/min |
| Limiting speed            |                | 14000 | r/min |

## Mass

|                                      |  |       |    |
|--------------------------------------|--|-------|----|
| Mass needle roller and cage assembly |  | 0.018 | kg |
|--------------------------------------|--|-------|----|