


NATR 6

Dimensions

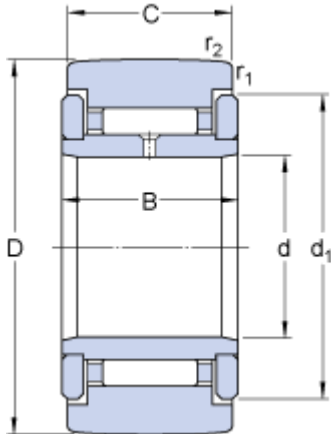

| | | |
|------------------|-----------|----|
| D | 19 | mm |
| d | 6 | mm |
| C | 11 | mm |
| B | 12 | mm |
| d ₁ | 15 | mm |
| r _{1,2} | min. 0.15 | mm |

Calculation data

| | | | |
|------------------------------|-----------------|----------|-------|
| Basic dynamic load rating | C | 3.47 | kN |
| Basic static load rating | C | 3.8 | kN |
| Fatigue load limit | P _u | 0.415 | kN |
| Maximum dynamic radial loads | F _r | max. 3.8 | kN |
| Maximum static radial loads | F _{0r} | max. 5.5 | kN |
| Limiting speed | | 5600 | r/min |

Mass

| | | | |
|---------------------|--|------|----|
| Mass support roller | | 0.02 | kg |
|---------------------|--|------|----|