



NA 4900.2RS

Dimensions

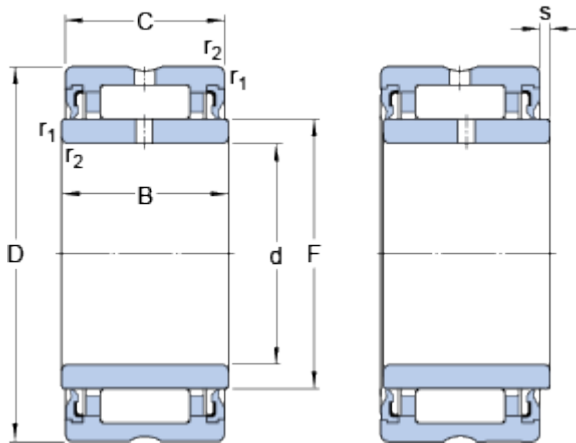

| | | | |
|------------------|------|-----|----|
| d | | 10 | mm |
| D | | 22 | mm |
| B | | 14 | mm |
| C | | 13 | mm |
| F | | 14 | mm |
| r _{1,2} | min. | 0.3 | mm |
| s | max. | 0.5 | mm |

Abutment dimensions

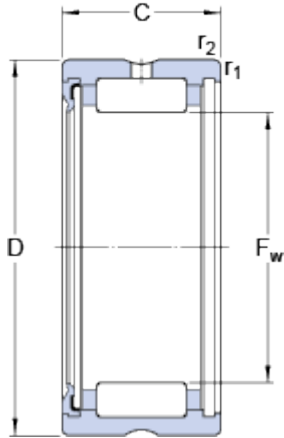

| | | | |
|----------------|------|-----|----|
| d _a | min. | 12 | mm |
| D _a | max. | 20 | mm |
| r _a | max. | 0.3 | mm |

Calculation data

| | | | |
|---------------------------|----------------|-------|-------|
| Basic dynamic load rating | C | 7.37 | kN |
| Basic static load rating | C | 8.15 | kN |
| Fatigue load limit | P _u | 0.965 | kN |
| Limiting speed | | 12000 | r/min |

Mass

| | | | |
|--------------|--|-------|----|
| Mass bearing | | 0.025 | kg |
|--------------|--|-------|----|