



NU 1010 ML

Dimensions

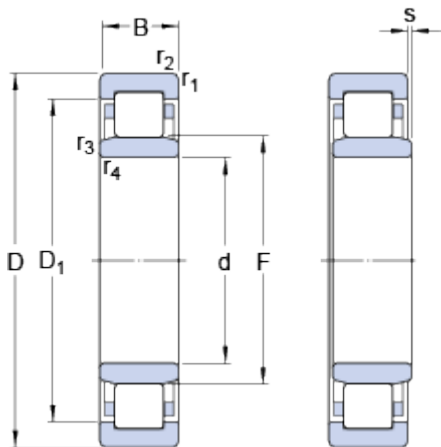

d	50	mm
D	80	mm
B	16	mm
D ₁	≈ 68.85	mm
F	57.5	mm
r _{1,2}	min. 1	mm
r _{3,4}	min. 0.6	mm
s	max. 2.5	mm

Abutment dimensions

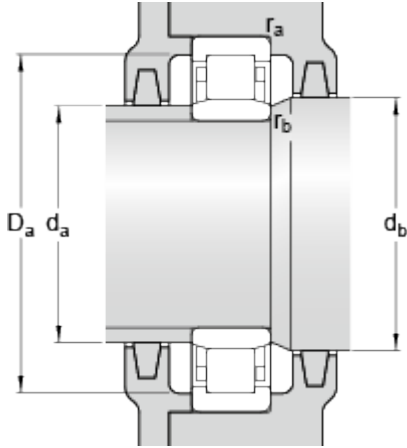

d _a	min. 57	mm
d _a	max. 56	mm
d _b	min. 59	mm
D _a	max. 74.6	mm
r _a	max. 1	mm
r _b	max. 0.6	mm

Calculation data

Basic dynamic load rating	C	31.9	kN
Basic static load rating	C	36	kN
Fatigue load limit	P _u	4.25	kN
Reference speed		10000	r/min
Limiting speed		15000	r/min
Calculation factor	k _r	0.15	
Limiting value	e	0.2	
Axial load factor	Y	0.6	

Mass

Mass bearing	0.31	kg
--------------	------	----