



# PCMW 264401.5 E

## Dimensions

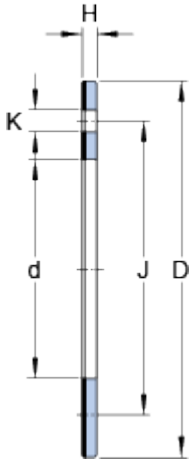

$d$	26	mm
$D$	44	mm
$H$	1.5	mm
$J$	35	mm
$K$	3.25	mm

## Abutment dimensions

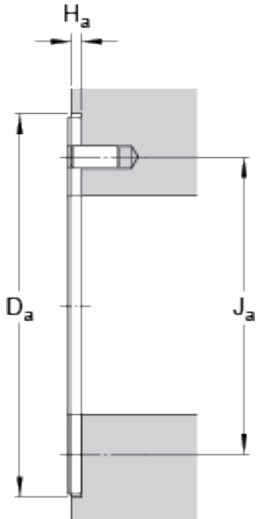

$D_a$	44	mm
$J_a$	35	mm
$H_a$	1	mm

## Calculation data

Basic dynamic load rating - radial direction	C	78	kN
Basic static load rating - radial direction	C	245	kN
Specific dynamic load factor	K	80	N/mm <sup>2</sup>
Specific static load factor	K	250	N/mm <sup>2</sup>
Factor depending on material and bearing type	$K_M$	300	
Permissible sliding velocity	$v$ max.	2	m/s
Permissible sliding velocity	$v$ min.	0	m/s
Coefficient of friction	$\mu$ max.	0.25	
Coefficient of friction	$\mu$ min.	0.03	

## Mass

Mass thrust washer	0.011	kg
--------------------	-------	----

