


PSM 121816 A51

Dimensions

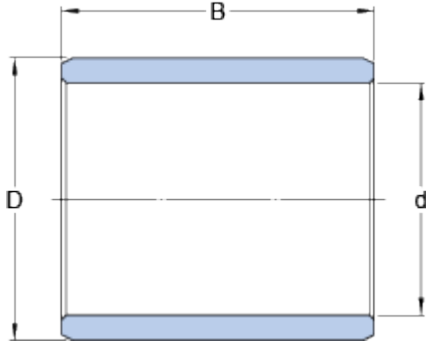

| | | |
|---|----|----|
| d | 12 | mm |
| D | 18 | mm |
| B | 16 | mm |

Recommended fits

| | |
|-------------------|----|
| Tolerance shaft | h8 |
| Tolerance housing | H7 |

Calculation data

| | | | |
|------------------------------|---|------|-------------------|
| Specific dynamic load factor | K | 10 | N/mm ² |
| Specific static load factor | K | 20 | N/mm ² |
| Permissible sliding velocity | v | min. | 0.25 m/s |
| Permissible sliding velocity | v | max. | 5 m/s |
| Coefficient of friction | μ | min. | 0.05 |
| Coefficient of friction | μ | max. | 0.1 |

Mass

| | | |
|--------------|-------|----|
| Mass bushing | 0.015 | kg |
|--------------|-------|----|