


# STO 17 X

## Dimensions

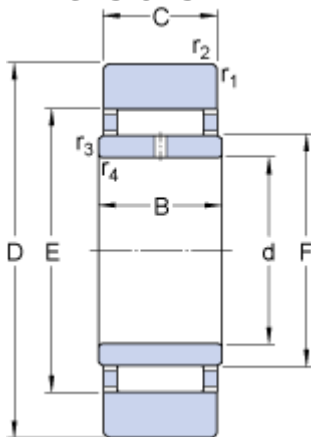

D	40	mm
d	17	mm
C	15.8	mm
B	16	mm
E	29	mm
F	22	mm
$r_{1,2}$	min. 0.3	mm
$r_{3,4}$	min. 0.3	mm

## Calculation data

Basic dynamic load rating	C	14.2	kN
Basic static load rating	C	17.6	kN
Fatigue load limit	$P_u$	2.08	kN
Maximum dynamic radial load	$F_r$	max. 12	kN
Maximum static radial load	$F_{0r}$	max. 17.3	kN
Limiting speed		4500	r/min

## Mass

Mass support roller		0.11	kg
---------------------	--	------	----