


# KR 16 PPXA

## Dimensions

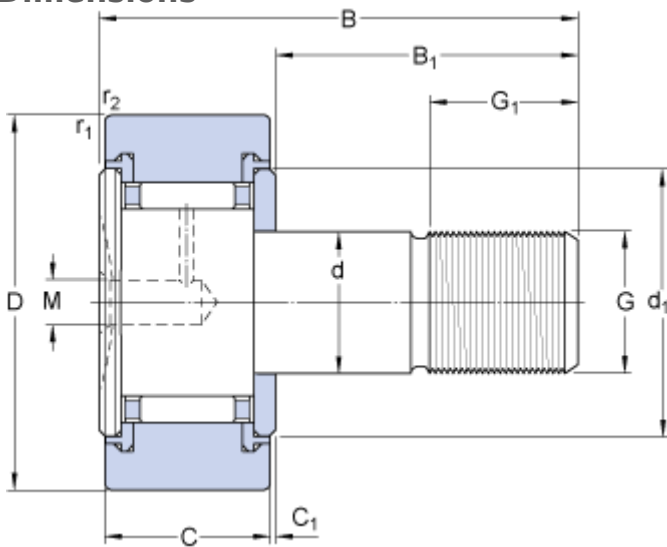

D	16	mm
d	6	mm
B	28	mm
C	11	mm
B <sub>1</sub>	16	mm
C <sub>1</sub>	0.6	mm
d <sub>1</sub>	12.5	mm
G	M 6	
G <sub>1</sub>	8	mm
M	4	mm
r <sub>1,2</sub>	min. 0.15	mm

## Calculation data

Basic dynamic load rating	C	3.14	kN
Basic static load rating	C	3.2	kN
Fatigue load limit	P <sub>u</sub>	0.345	kN
Maximum dynamic radial loads	F <sub>r</sub>	max. 2.9	kN
Maximum static radial loads	F <sub>or</sub>	max. 4.15	kN
Limiting speed		6000	r/min

## Mass

Mass cam follower	0.018	kg
-------------------	-------	----

## Mounting information

Recommended tightening torque	3	N·m
-------------------------------	---	-----

## Included products

Grease fitting	NIP A1
Hexagonal nut	M 6x1

## Associated products

Plug	VD1
------	-----