


# KR 19 PPXA

## Dimensions

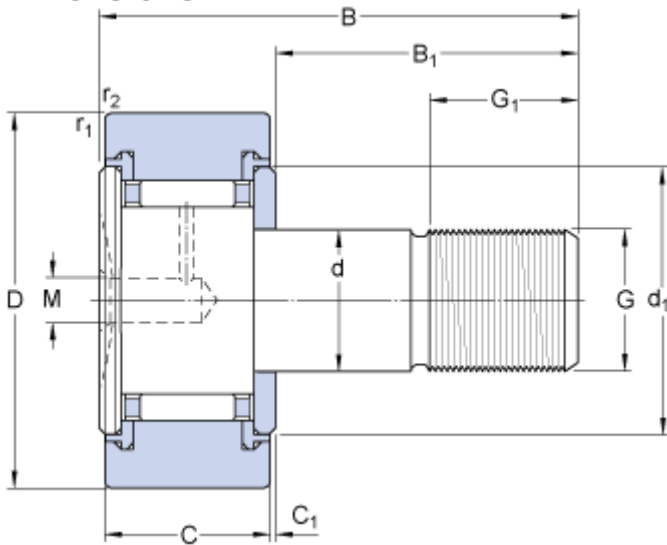

D	19	mm
d	8	mm
B	32	mm
C	11	mm
B <sub>1</sub>	20	mm
C <sub>1</sub>	0.6	mm
d <sub>1</sub>	15	mm
G	M 8	
G <sub>1</sub>	10	mm
M	4	mm
r <sub>1,2</sub>	min. 0.15	mm

## Calculation data

Basic dynamic load rating	C	3.47	kN
Basic static load rating	C	3.8	kN
Fatigue load limit	P <sub>u</sub>	0.415	kN
Maximum dynamic radial loads	F <sub>r</sub>	max. 3.8	kN
Maximum static radial loads	F <sub>0r</sub>	max. 5.5	kN
Limiting speed		5600	r/min

## Mass

Mass cam follower	0.029	kg
-------------------	-------	----

## Mounting information

Recommended tightening torque	8	N·m
-------------------------------	---	-----

## Included products

Grease fitting	NIP A1
Hexagonal nut	M 8x1.25

## Associated products

Plug	VD1
------	-----