


PWM 404860

Dimensions

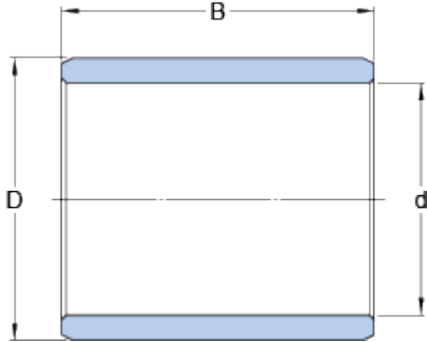

d	40	mm
D	48	mm
B	60	mm

Recommended fits

Tolerance shaft	h8
Tolerance housing	H7

Calculation data

Specific dynamic load factor	K	140	N/mm ²
Specific static load factor	K	200	N/mm ²
Effective load carrying cross section	A	2320	mm ²
Permissible sliding velocity	v min.	0	m/s
Permissible sliding velocity	v max.	0.5	m/s
Coefficient of friction	μ min.	0.03	
Coefficient of friction	μ max.	0.08	

Mass

Mass bushing	0.062	kg
--------------	-------	----