


STO 25

Dimensions

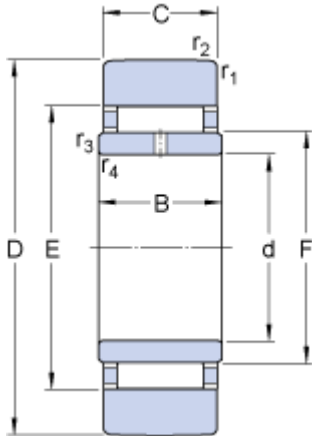

D		52	mm
d		25	mm
C		15.8	mm
B		16	mm
E		37	mm
F		30	mm
r _{1,2}	min.	0.3	mm
r _{3,4}	min.	0.3	mm

Calculation data

Basic dynamic load rating	C		16.5	kN
Basic static load rating	C		22.8	kN
Fatigue load limit	P _u		2.7	kN
Maximum dynamic radial load	F _r	max.	18	kN
Maximum static radial load	F _{0r}	max.	26	kN
Limiting speed			3400	r/min

Mass

Mass support roller			0.18	kg
---------------------	--	--	------	----