


STO 30

Dimensions

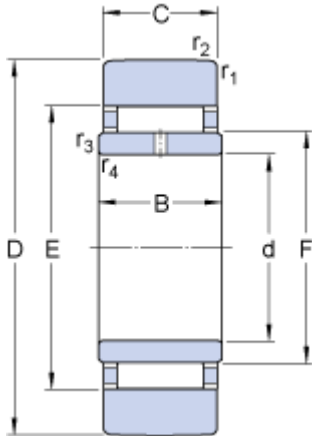

D		62	mm
d		30	mm
C		19.8	mm
B		20	mm
E		46	mm
F		38	mm
r _{1,2}	min.	0.6	mm
r _{3,4}	min.	0.6	mm

Calculation data

Basic dynamic load rating	C		22.9	kN
Basic static load rating	C		34.5	kN
Fatigue load limit	P _u		4.25	kN
Maximum dynamic radial load	F _r	max.	23.6	kN
Maximum static radial load	F _{0r}	max.	33.5	kN
Limiting speed			2600	r/min

Mass

Mass support roller			0.31	kg
---------------------	--	--	------	----