


STO 6 TN

Dimensions

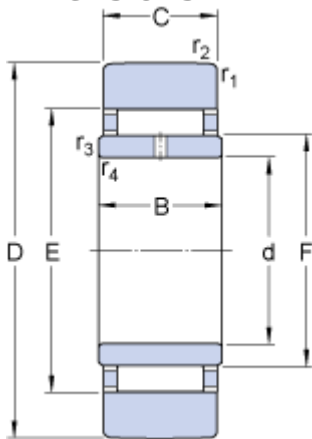

D		19	mm
d		6	mm
C		9.8	mm
B		10	mm
E		13	mm
F		10	mm
r _{1,2}	min.	0.3	mm
r _{3,4}	min.	0.3	mm

Calculation data

Basic dynamic load rating	C		3.74	kN
Basic static load rating	C		4.5	kN
Fatigue load limit	P _u		0.5	kN
Maximum dynamic radial load	F _r	max.	4.25	kN
Maximum static radial load	F _{0r}	max.	6.1	kN
Limiting speed			7000	r/min

Mass

Mass support roller			0.017	kg
---------------------	--	--	-------	----