

SKF Food Grade Lubricants

High load, water resistant and wide temperature food grade grease

LGFQ 2

SKF LGFQ 2 is a synthetic oil based grease using the latest complex calcium sulphonate thickener technology. It is suitable for applications subjected to high loads, wet environment and fluctuating temperatures encountered in the food and beverage industry.

- Excellent corrosion protection
- Excellent mechanical stability
- Excellent high load lubricating capacity
- Good false brinelling protection
- Good pumpability down to low temperatures
- NSF H1 registered and Halal and Kosher certified

Typical applications

- Pellet presses (pet food, sugar, salt)
- Mixers
- Mills
- Centralized lubrication systems



Available pack sizes

Packsizes	Designation	Packsizes	Designation
420 ml cartridge	LGFQ 2/0.4	Electro-mechanical lubricators	
18 kg pail	LGFQ 2/18	TLSD series 125 ml refill	LGFQ 2/SD125
50 kg drum	LGFQ 2/50	TLSD series 250 ml refill	LGFQ 2/SD250
180 kg drum	LGFQ 2/180	Electro-mechanical lubricant dispensers	
Gas driven lubricators		TLMR 101 series 380 ml refill (incl. battery)	LGFQ 2/MR380B
LAGD series 125 ml	LAGD 125/FQ2	TLMR 201 series 380 ml refill	LGFQ 2/MR380




Technical data

Designation	LGFQ 2/(pack size)	
DIN 51825	KP1/2N-40	Corrosion protection
Thickener	Complex calcium sulphonate	Emcor: – standard ISO 11007 0–0
NLGI grade	1–2	– salt water test (0.5% NaCl) DIN 51802 0–0
Colour	Brown	Water resistance
Base oil type	Synthetic (PAO)	DIN 51807/1, 3 hrs at 90 °C 1 max.
Operating temperature range	–40 to +140 °C (–40 to +284 °F)	Water wash out ASTM D1264, % 0
Dropping point, DIN ISO 2176	>300 °C (>570 °F)	Oil separation
Base oil viscosity		DIN 51817, 7 days at 40 °C, % 3 max.
40 °C, mm ² /s	320	Lubrication ability
100 °C, mm ² /s	30	R2F, running test B at 120 °C Pass
Penetration DIN ISO 2137		Copper corrosion
60 strokes	280–310	DIN 51811 1b max. at 100 °C (210 °F)
100 000 strokes	+30 max.	EP performances
Mechanical stability		DIN 51350/5, wear scar, 1 400 N, mm 1 max.
Roll stability, 50h at 80 °C, 10 ⁻¹ mm	–20 to +30 max.	DIN 51350/4, weld load, N >4 000
		Fretting corrosion
		ASTM D4170 FAFNIR test, mm 0,8 ¹⁾
		Shelf life
		2 years
		NSF Reg. No.
		153759

¹⁾ Typical value

Lubrication management

Just as asset management takes maintenance to a higher level, a lubrication management approach allows lubrication to be seen from a wider point of view. This approach helps to effectively increase machine reliability at a lower overall cost.

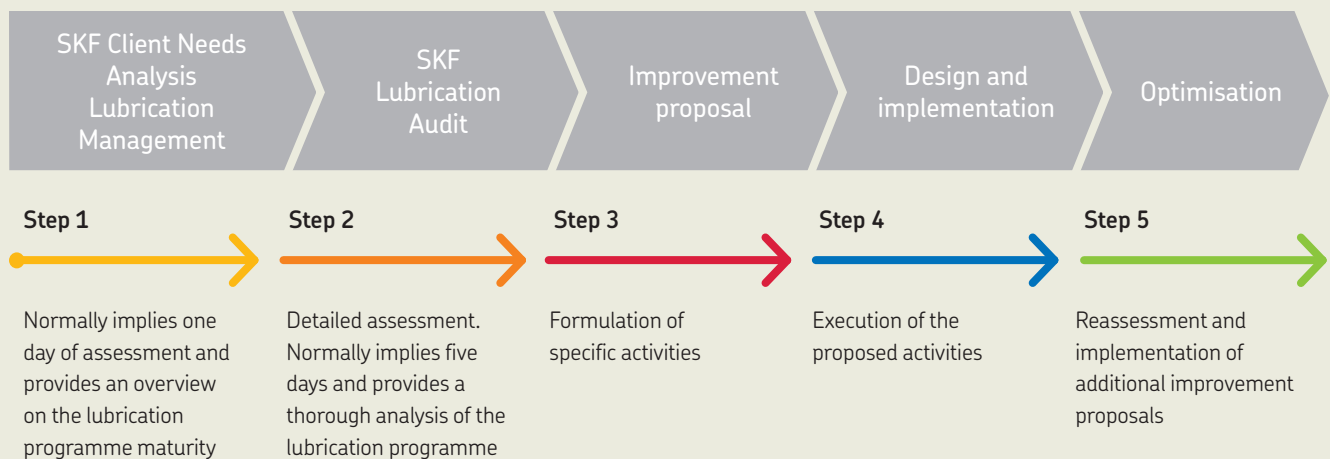

skf.com | mapro.skf.com | skf.com/lubrication

© SKF is a registered trademark of the SKF Group.

© SKF Group 2017

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MP/P8 16720 EN · June 2017

Certain image(s) used under license from Shutterstock.com.